


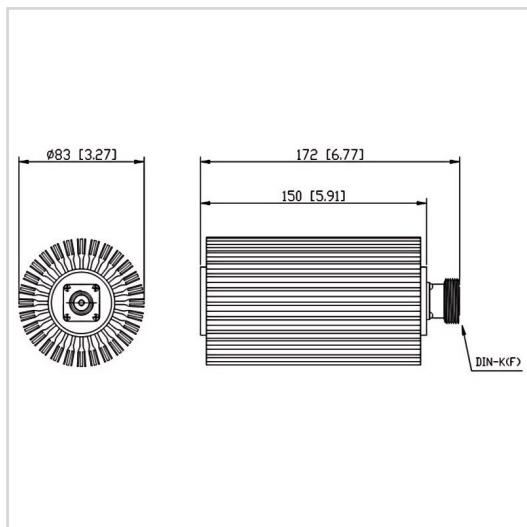

RF Solution offer a wide selection of Coaxial Low PIM Termination for global customers. CT-100W-RX8315-IP65-DINK-0.35-6G is a Coaxial Low PIM Termination in Frequency Range of DC 0.35~6.0 GHz. It is made of high quality materials under a high standard, the Connector Type of this product is DIN-F (K), VSWR Max is 1.30 and Impedance is 50 Ω . The component has a good working performance and stability, it is ideal for handling a Power of 100 W.

Product Details

Part Number	CT-100W-RX8315-IP65-DINK-0.35-6G
Description	DC 0.35~6.0 GHz Coaxial Low PIM Termination

General Parameters

Frequency Range	DC 0.35~6.0 GHz
Connector Type	DIN-F (K)
VSWR Max	1.30
Impedance	50 Ω
Power	100 W
PIM3 Max	-150dBc/-155dBc/-160dBc @2*43dBm
Waterproof Grade	IP65/IP67
Size	Φ 83*150 mm
Weight	1200 g
Color	Black
Operating Temperature	-35~+75 $^{\circ}$ C
Storage Temperature	/
ROHS Compliant	Yes

Outline Drawing (mm)

