


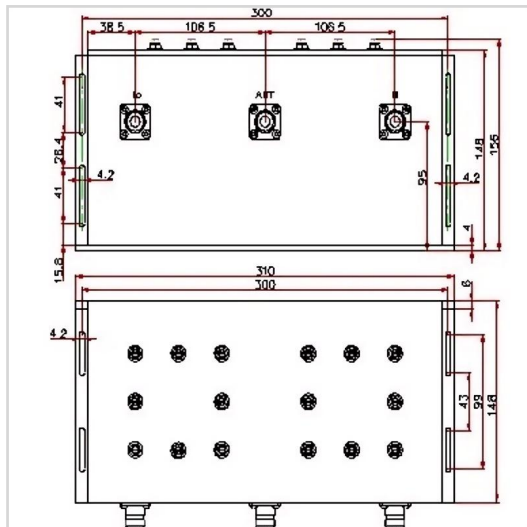

RF Solution offer a wide selection of RF Duplexer for global customers. DUP-151M161-01N is a RF Duplexer in Frequency Range of 155.1~162 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 1.5 dB, Ripple Max is 0.6 dB and Return Loss Min is 18 dB. The component has a good working performance and stability, it is ideal for handling a Power Rating of 800 W.

Product Details

Part Number	DUP-151M161-01N
Description	155.1~162 MHz RF Duplexer

General Parameters

Frequency Range	155.1~162 MHz
Insertion Loss Max	1.5 dB
Ripple Max	0.6 dB
Return Loss Min	18 dB
Power Rating	800 W
Rejection Min	75 dB
VSWR Max	/
Impedance	50 Ω
Connector Type	N-F
Size	310*148*156 mm
Color	Black
Operating Temperature	-20~+60 °C
ROHS Compliant	Yes

Outline Drawing (mm)

