


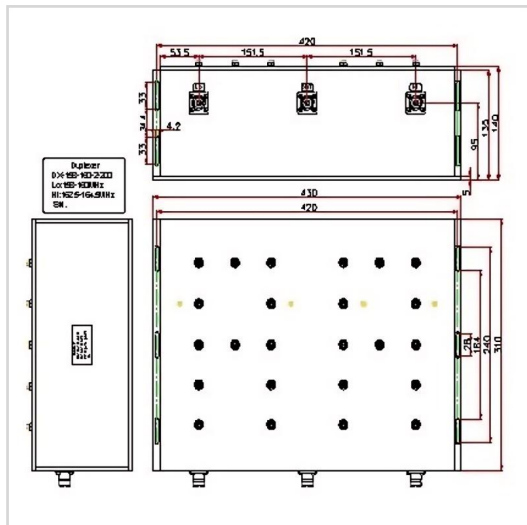

RF Solution offer a wide selection of RF Duplexer for global customers. DUP-158M162-02N is a RF Duplexer in Frequency Range of 158~164.5 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 1.5 dB, Ripple Max is 0.8 dB and Return Loss Min is /. The component has a good working performance and stability, it is ideal for handling a Power Rating of 200 W.

Product Details

Part Number	DUP-158M162-02N
Description	158~164.5 MHz RF Duplexer

General Parameters

Frequency Range	158~164.5 MHz
Insertion Loss Max	1.5 dB
Ripple Max	0.8 dB
Return Loss Min	/
Power Rating	200 W
Rejection Min	/
VSWR Max	1.25
Impedance	50 Ω
Connector Type	N-F
Size	430*310*150 mm
Color	Black
Operating Temperature	-30~+60 $^{\circ}\text{C}$
ROHS Compliant	Yes

Outline Drawing (mm)

