


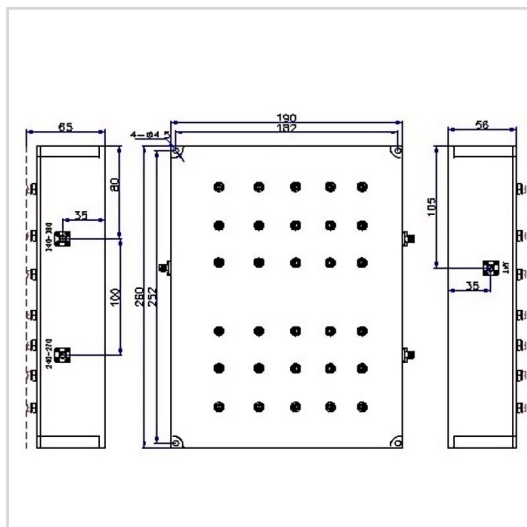

RF Solution offer a wide selection of RF Duplexer for global customers. DUP-240M340-30A40S is a RF Duplexer in Frequency Range of 240~380 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 1.0 dB, Ripple Max is 0.6 dB and Return Loss Min is 18 dB. The component has a good working performance and stability, it is ideal for handling a Power Rating of 10 W.

Product Details

Part Number	DUP-240M340-30A40S
Description	240~380 MHz RF Duplexer

General Parameters

Frequency Range	240~380 MHz
Insertion Loss Max	1.0 dB
Ripple Max	0.6 dB
Return Loss Min	18 dB
Power Rating	10 W
Rejection Min	80 dB / 50 dB
Bandwidth	30 MHz / 40 MHz
VSWR Max	/
Impedance	50 Ω
Connector Type	N-F
Size	260*190*65 mm
Color	Black
Operating Temperature	-40~+75 °C
ROHS Compliant	Yes

Outline Drawing (mm)

