


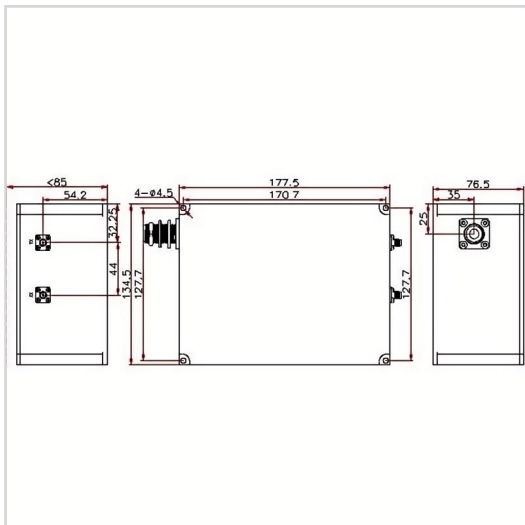

RF Solution offer a wide selection of RF Duplexer for global customers. DUP-351M361-05SNS is a RF Duplexer in Frequency Range of 240~380 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 1.6 dB(Full temperature $\leq$ 1.8), Ripple Max is 0.6 dB and Return Loss Min is 18 dB. The component has a good working performance and stability, it is ideal for handling a Average Power of 80 W.

Product Details

Part Number	DUP-351M361-05SNS
Description	351~366 MHz RF Duplexer

General Parameters

Frequency Range	240~380 MHz
Insertion Loss Max	1.6 dB(Full temperature $\leq$ 1.8)
Ripple Max	0.6 dB
Return Loss Min	18 dB
Average Power	80 W
Peak Power	200 W
Rejection Min	80 dB / 50 dB
Bandwidth	30 MHz / 40 MHz
VSWR Max	/
Impedance	50 Ω
Connector Type	N-F / SMA-F
Size	177.5*134.5*85 mm
Color	Black
Operating Temperature	-20~+60 $^{\circ}$ C



ROHS Compliant

Yes

Outline Drawing (mm)

