


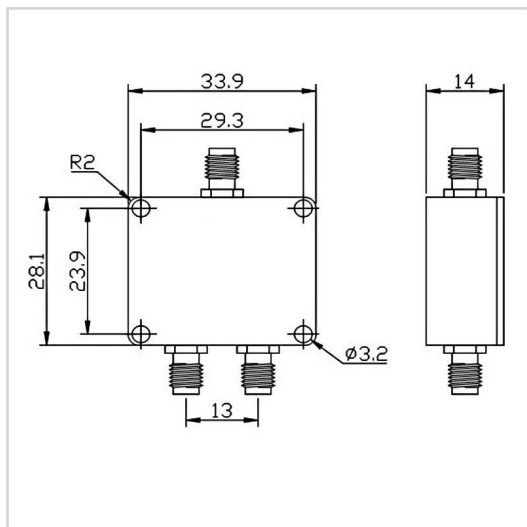

RF Solution offer a wide selection of 2 Ways Power Divider for global customers. PD02-F3428-S-5200-5400MH is a 2 Ways Power Divider in Frequency Range of 5200~5400 MHz. It is made of high quality materials under a high standard, the Split Loss of this product is 3.0 dB, Insertion Loss Max is 0.5 dB and Isolation Min is 20.0 dB. The component has a good working performance and stability, it is ideal for handling a Forward Power of 20 W.

Product Details

Part Number	PD02-F3428-S-5200-5400MH
Description	5200~5400 MHz 2 Ways Power Divider

General Parameters

Frequency Range	5200~5400 MHz
Split Loss	3.0 dB
Insertion Loss Max	0.5 dB
Isolation Min	20.0 dB
Forward Power	20 W
VSWR Max	1.25
Impedance	50 Ω
Connector Type	SMA-F
Size	33.9*28.1*14 mm
Weight	/
Operating Temperature	-45~+85 °C
Storage Temperature	-45~+85 °C
ROHS Compliant	Yes

Outline Drawing (mm)

