


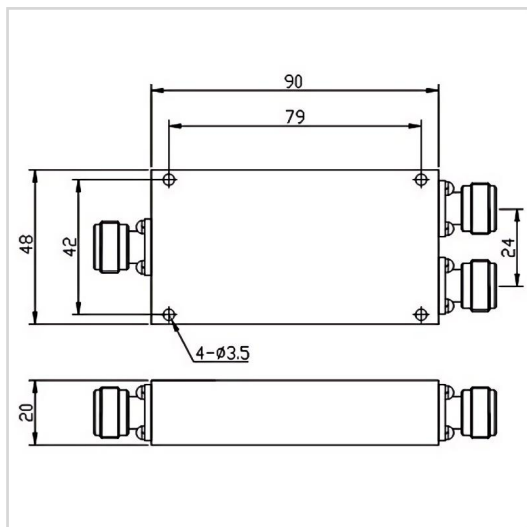

RF Solution offer a wide selection of 2 Ways Power Divider for global customers. PD02-F4890-N-134-3700MHz is a 2 Ways Power Divider in Frequency Range of 134~3700 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 2.0 dB, Isolation Min is 18.0 dB and Amplitude Unbalance is  $\pm 0.3$  dB. The component has a good working performance and stability, it is ideal for handling a Forward Power of 20 W.

## Product Details

|             |                                  |
|-------------|----------------------------------|
| Part Number | PD02-F4890-N-134-3700MHz         |
| Description | 300~500 MHz 2 Ways Power Divider |

## General Parameters

|                       |                            |
|-----------------------|----------------------------|
| Frequency Range       | 134~3700 MHz               |
| Insertion Loss Max    | 2.0 dB                     |
| Isolation Min         | 18.0 dB                    |
| Amplitude Unbalance   | $\pm 0.3$ dB               |
| Forward Power         | 20 W                       |
| Reverse Power         | 2 W                        |
| VSWR Input Max        | 1.30                       |
| VSWR Output Max       | 1.30                       |
| Impedance             | 50 $\Omega$                |
| Connector Type        | N-F                        |
| Size                  | 90.0*48.0*20.0 mm          |
| Weight                | /                          |
| Surface Finishing     | Black Painting             |
| Operating Temperature | -45~+75 $^{\circ}\text{C}$ |



ROHS Compliant

Yes

**Outline Drawing (mm)**