


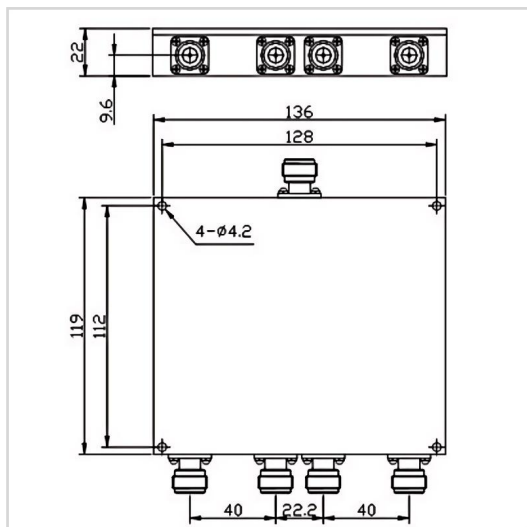

RF Solution offer a wide selection of 4 Ways Power Divider for global customers. PD04-F6086-S-500-6000MHz is a 4 Ways Power Divider in Frequency Range of 500~6000 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 1.5 dB, Isolation Min is 20 dB and Amplitude Unbalance is ± 0.5 dB. The component has a good working performance and stability, it is ideal for handling a Forward Power of 20 W.

Product Details

Part Number	PD04-F6086-S-500-6000MHz
Description	500~6000 MHz 4 Ways Power Divider

General Parameters

Frequency Range	500~6000 MHz
Insertion Loss Max	1.5 dB
Isolation Min	20 dB
Amplitude Unbalance	± 0.5 dB
Forward Power	20 W
Reverse Power	1 W
VSWR Input Max	1.40
VSWR Output Max	1.30
Phase Unbalance	$\pm 5^\circ$
Impedance	50 Ω
Connector Type	SMA-F
Size	86*60*10 mm
Weight	/
Surface Finishing	Grey Painting



Operating Temperature	-45~+85 °C
ROHS Compliant	Yes

Outline Drawing (mm)

