


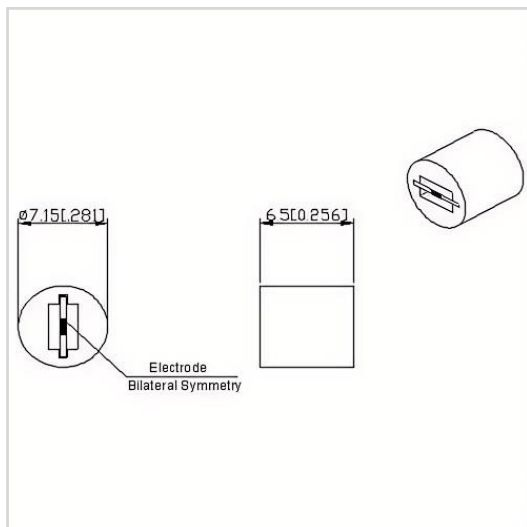

RF Solution offer a wide selection of Microstrip Attenuator with Sleeve for global customers. RFTXX-05TA7265-12.4 is a Microstrip Attenuator with Sleeve in Frequency Range of DC~12.4 GHz. It is made of high quality materials under a high standard, the Attenuation Value of this product is ①01-10 dB ②11-20 dB ③21-30 dB, Attenuation Tolerance is ① ± 0.6 dB ② ± 0.7 dB ③ ± 1.0 dB and VSWR Max is 1.25 type 1.3. The component has a good working performance and stability, it is ideal for handling a Power of 5 W.

Product Details

Part Number	RFTXX-05TA7265-12.4
Description	DC~12.4 GHz Microstrip Attenuator With Sleeve

General Parameters

Frequency Range	DC~12.4 GHz
Attenuation Value	①01-10 dB ②11-20 dB ③21-30 dB
Attenuation Tolerance	① ± 0.6 dB ② ± 0.7 dB ③ ± 1.0 dB
VSWR Max	1.25 type 1.3
Power	5 W
Impedance	50 Ω
Size	$\Phi 7.15 \times 6.5$ mm
Temperature Coefficient Max	150 ppm/ $^{\circ}\text{C}$
Substrate Material	BeO
Sleeve Material	Al (Conductive oxidation natural color)
Resistance Process	Thick Film
Operating Temperature	-55 ~ +125 $^{\circ}\text{C}$
ROHS Compliant	Yes



Outline Drawing (mm)

