


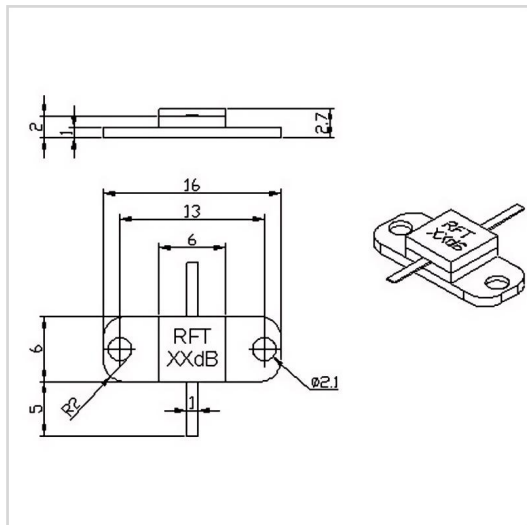

RF Solution offer a wide selection of Flanged Attenuator for global customers. RFTXX-60AM1606-6 is a Flanged Attenuator in Frequency Range of DC~6.0 GHz. It is made of high quality materials under a high standard, the Attenuation Value of this product is ①01-10 dB②15,20 dB③25,30 dB, Attenuation Tolerance is ① ± 0.6 dB② ± 0.8 dB③ ± 1.0 dB and VSWR Max is 1.25. The component has a good working performance and stability, it is ideal for handling a Rated Power of 60 W.

Product Details

Part Number	RFTXX-60AM1606-6
Description	DC~6.0 GHz Flanged Attenuator

General Parameters

Frequency Range	DC~6.0 GHz
Attenuation Value	①01-10 dB②15,20 dB③25,30 dB
Attenuation Tolerance	① ± 0.6 dB② ± 0.8 dB③ ± 1.0 dB
VSWR Max	1.25
Rated Power	60 W
Impedance	50 Ω
Temperature Coefficient Max	150 ppm/ $^{\circ}$ C
Size	Refer to the design drawing
Substrate Material	BeO
Porcelain Hat Material	Al ₂ O ₃
Flange	Nickel-plated Copper
Lead	99.99% Sterling Silver
Resistance Technology	Thick Film
Operating Temperature	-55 to +150 $^{\circ}$ C



ROHS Compliant

Yes

Outline Drawing (mm)

