


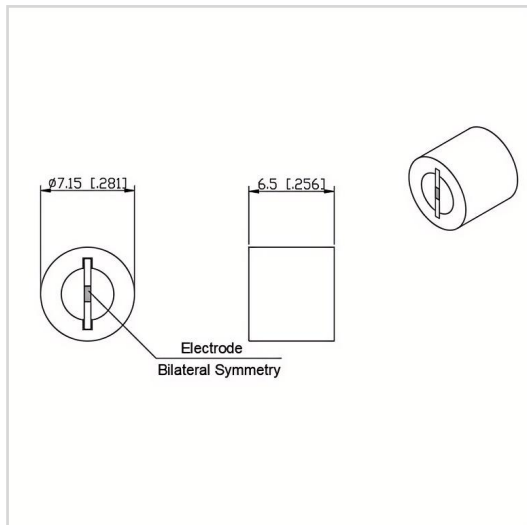

RF Solution offer a wide selection of Microstrip Attenuator with Sleeve for global customers. RFTXXA-02TA7265-12.4 is a Microstrip Attenuator with Sleeve in Frequency Range of DC~12.4 GHz. It is made of high quality materials under a high standard, the Attenuation Value of this product is ①01-10 dB ②11-20 dB ③30 dB, Attenuation Tolerance is ① ± 0.5 dB ② ± 1.0 dB ③ ± 1.0 dB and VSWR Max is 1.20 @10GHz/1.25@12.4GHz. The component has a good working performance and stability, it is ideal for handling a Power of 2 W.

Product Details

Part Number	RFTXXA-02TA7265-12.4
Description	DC~12.4 GHz Microstrip Attenuator With Sleeve

General Parameters

Frequency Range	DC~12.4 GHz
Attenuation Value	①01-10 dB ②11-20 dB ③30 dB
Attenuation Tolerance	① ± 0.5 dB ② ± 1.0 dB ③ ± 1.0 dB
VSWR Max	1.20 @10GHz/1.25@12.4GHz
Power	2 W
Impedance	50 Ω
Size	$\Phi 7.15 \times 6.5$ mm
Temperature Coefficient Max	150 ppm/ $^{\circ}\text{C}$
Substrate Material	Al ₂ O ₃
Sleeve Material	Al (Conductive oxidation natural color)
Resistance Process	Thick Film
Operating Temperature	-55 ~ +125 $^{\circ}\text{C}$
ROHS Compliant	Yes



Outline Drawing (mm)

