

RF Solution offer a wide selection of Coaxial Isolator for global customers. TG6060ES is a Coaxial Isolator in Frequency Range of $40{\sim}400$ MHz. It is made of high quality materials under a high standard, the Bandwidth Max of this product is 50%, Insertion Loss Max is $0.40{\sim}1.80$ dB and Isolation Min is $18.0{\sim}23.0$ dB. The component has a good working performance and stability, it is ideal for handling a Forward Power of 50/100/150 W.


Product Details

Part Number	TG6060ES
Description	40 to 400 MHz Coaxial Isolator

General Parameters

Frequency Range	40~400 MHz
Bandwidth Max	50%
Insertion Loss Max	0.40~1.80 dB
Isolation Min	18.0~23.0 dB
Forward Power	50/100/150 W
Reverse Power	20/100 W
VSWR Max	1.15~1.30
Impedance	50 Ω
Connector Type	SMA-F
Size	60.0*60.0*25.0 mm
Weight	310 g
Operating Temperature	-20~+70 °C
Storage Temperature	-50~+90 ℃
ROHS Compliant	Yes

Outline Drawing (mm)

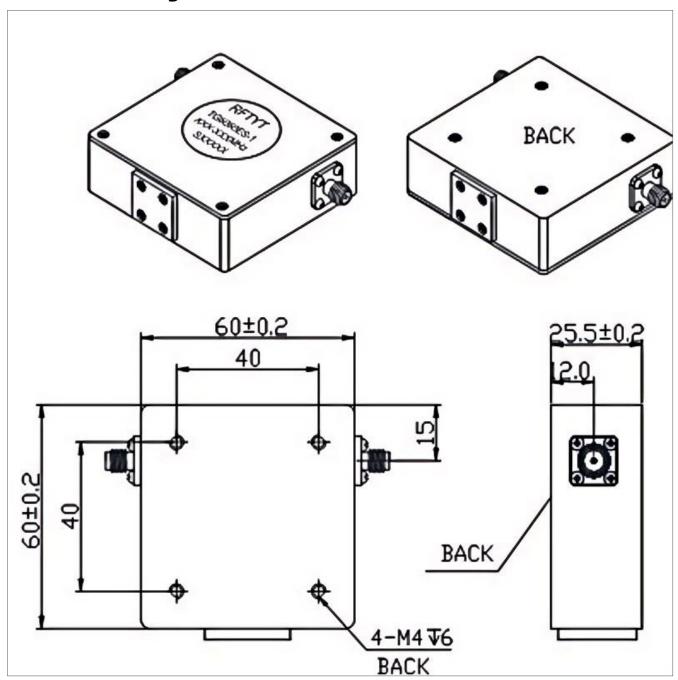

Test Chart



