


2.0 to 6.0GHz Drop in Isolator

WG3030B Microstrip line

Outline Drawing (mm): 

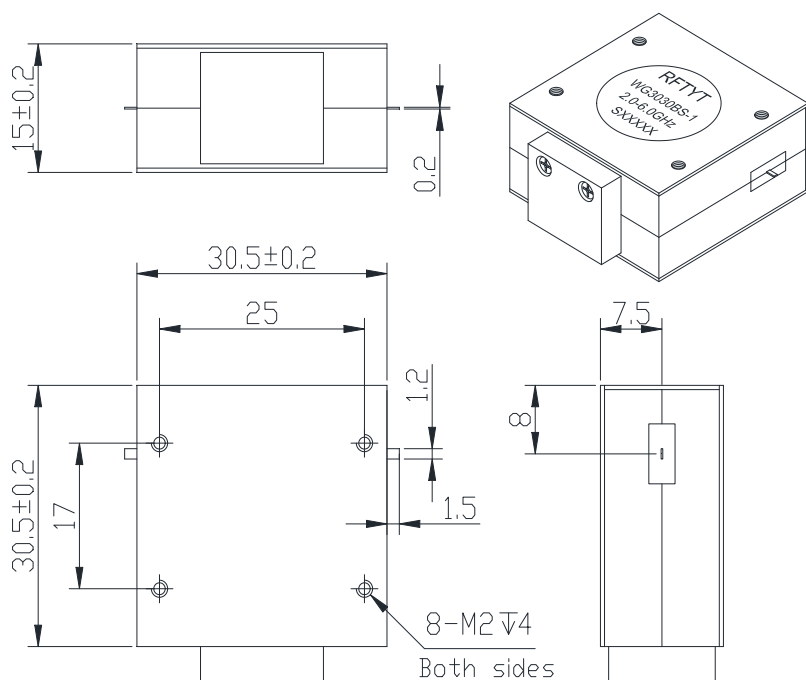

Features:

- ◇ Good temperature stability
- ◇ Withstand high power
- ◇ RoHS compliant
- ◇ Weight : \approx 110 g


Material list:

- ◇ Cavity: aluminum conductive oxidation
- ◇ Housing: Industrial pure iron nickel plated
- ◇ Conductor: silver plated brass
- ◇ Load chamber: aluminum conductive oxidation

Application:

- ◇ Rf amplifier final stage, protect the amplifier
- ◇ Digital communication
- ◇ Satellite communication
- ◇ Mobile communication

Order Examples:

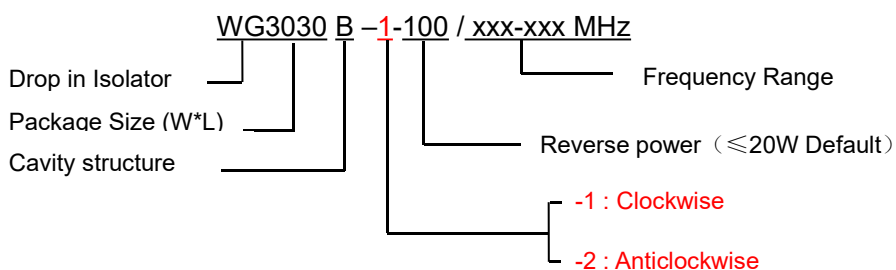

Basic Specifications:

Impedance	50 Ω
Connection type	Microstrip line
Size(mm)	30.5*30.5*15.0
Operating Temp	-10~+60 $^{\circ}$ C
Storage temperature	-50~+90 $^{\circ}$ C



Specifications:

Model No. (X=1: →Clockwise) (X=2: ←Anticlockwise)	Freq. Range GHz	IL. dB (max)	Isolation dB (min)	VSWR	Forward Power CW	Reverse Power W	Notes
WG3030B-X/2.0-6.0GHz	2.0-6.0	0.85	12.0	1.50	50	20	-10~+60°C
		1.70	12.0	1.60			-40~+70°C

Instructions:

- 1, The isolator reflected power is 20W;
- 2, Only some common frequencies in the table, can be produced according to user requirements;
- 3, Embedded isolator, please use stainless steel or brass screws when installing;
- 4, If you do not find the frequency you want, please contact us!