


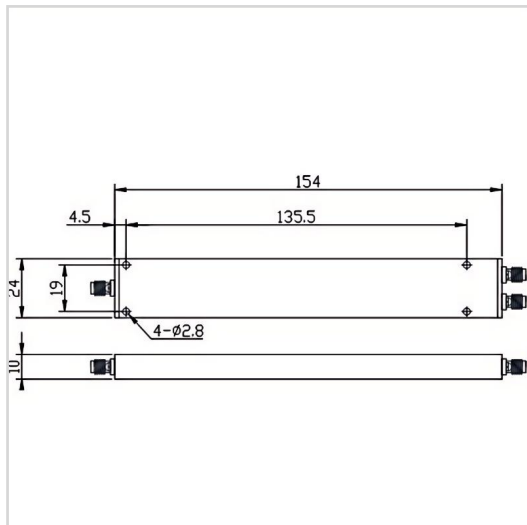

RF Solution offer a wide selection of 2 Ways Power Divider for global customers. PD02-F2415-S-0.5-18GHz is a 2 Ways Power Divider in Frequency Range of 0.5~18.0 GHz. It is made of high quality materials under a high standard, the Amplitude Unbalance of this product is ± 0.4 dB, Insertion Loss Max is 1.6 dB and Isolation Min is 16.0 dB. The component has a good working performance and stability, it is ideal for handling a Forward Power of 20 W.

Product Details

Part Number	PD02-F2415-S-0.5-18GHz
Description	0.5~18.0 GHz 2 Ways Power Divider

General Parameters

Frequency Range	0.5~18.0 GHz
Amplitude Unbalance	± 0.4 dB
Insertion Loss Max	1.6 dB
Isolation Min	16.0 dB
Forward Power	20 W
Reverse Power	1 W
VSWR Input Max	1.50
VSWR Output Max	1.40
Impedance	50 Ω
Connector Type	SMA-F
Size	154*24*10 mm
Weight	/
Surface Finishing	Black Painting
Operating Temperature	-45~+85 $^{\circ}\text{C}$



Storage Temperature	/
ROHS Compliant	Yes

Outline Drawing (mm)

